

Olivier van Noortweg 7 5928 LX Venlo The Netherlands T +31 (0) 492 588 600 F +31 (0) 492 588 609

sales@talson.com / www.talson.com

Talson Specials TCM TAL Technical Sheet

TAISON REPORTED IN THE REPORT OF THE REPORT
















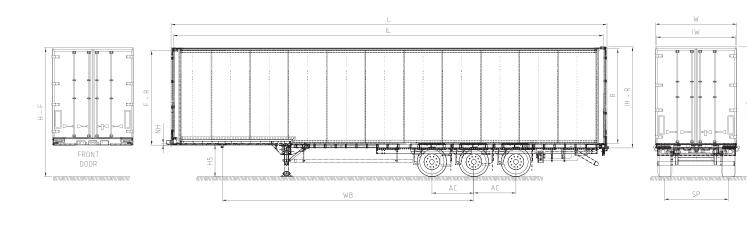

TECHNICAL DATA


H5	5 th Wheel Height	1.020 mm
WB	Wheel Base	7.455 mm
IL	Inner Length	13.320 mm
L	Total Length	13.595 mm
IW	Inner Width	2.472 mm
W	Total Width	2.550 mm
Н	Overall Height	4.035 mm
IH	Inner Height	2.900 mm

TECHNICAL CAPACITIES

Tare Weight	9.440 kg
Total Permissible Weight	39.000 kg
Technical Possible Axle Load	27.000 kg
Technical Possible King Pin Load	12.000 kg

SPECIAL FEATURES

- Aluminium panel technology
- · Multi-purpose Talfix® panels
- EN 12642 Code XL Certificate
- · Special carpet cradle
- Easy loading/unloading with front and rear doors
- · Special forklift space



Talson Specials

TCM TAL Detail Brochur















SIDE UNDERRUN PROTECTION

The side underrun rail is a lateral protection device made of KTL coated steel profile which can be folded upwards for easier access to vehicle when needed.



FRONT AND REAR LOADING

With doors opening on each side, double sided loading makes it especially easy to



load carpets and other lengthy loads.



TALFIX

Multi-functional, patented Talfix system enables you to combine carriage-loading models in one trailer. It offers double decking, garment hanging and extra load security. It provides multi functional usage of the vehicle to increase profitability.



ALUMINUM SIDE PANELS

Talson's self-supporting box body construction is manufactured using a special aluminium sandwich design. The outer layer consists of high-quality aluminium sheets that are connected to the sub-structure and provide a lighter and brighter design. Aluminium side panels are made up between 10 to 12 separate plates allowing cheap and fast repair when needed. You can easily change the dented plate without touching the others.



Special carpet cradle is designed to make carpet loading/unloading significantly easier and faster. It has 20 epdm rubbers on its floor to provide a high range of movement and effectiveness. Steel floor and aluminum side panels make it sturdy and durable. With it's lock-in-place system it can be stabilized in 5 different positions inside the carriage to offer operational



INTEGRATED LASHING RINGS

Talson trailers are equipped with 26 lashing rings, 13 on each side, discreetly integrated into the vehicle floor to anchor heavy weights for maximum load security.