


Talson Solutioner
TGG TAL
 Technical Sheet

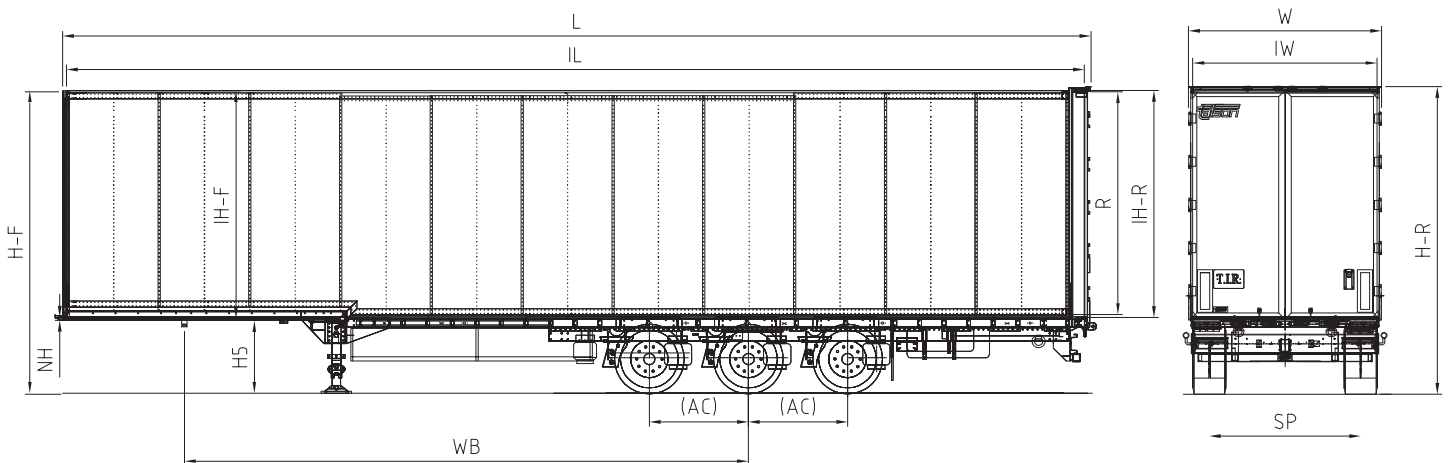

TECHNICAL DATA

H5	5 th Wheel Height	950 mm
WB	Wheel Base	7.455 mm
IL	Inner Length	13.605 mm
L	Total Length	13.710 mm
IW	Inner Width	2.472 mm
W	Total Width	2.550 mm
H	Overall Height	4.000 mm
IH-F	Front Internal Height	2.940 mm
R	Rear Loading Height	2.890 mm

TECHNICAL CAPACITIES

Tare Weight	7.800 kg
Total Permissible Weight	39.000 kg
Technical Possible Axle Load	27.000 kg
Technical Possible King Pin Load	12.000 kg

SPECIAL FEATURES

- Aluminium panel technology
- Multi-purpose Talfix® panels
- EN 12642 - Code XL Certificate

Talson Solutioner

TGG TAL

Detail Brochure



SIDE UNDERRUN PROTECTION

The side underrun rail is a lateral protection device made of KTL coated steel profile which can be folded upwards for easier access to vehicle when needed..



GARMENT BARS

A component of patented Talfix systems, the garment bar allows garments to be hung inside the trailer with ease. The bars also lock into place providing extra load security.



TALSON DOOR

Talson door is a container style door, designed to provide maximum strength at the rear and optimum load security. It improves durability and handling of the trailer. Also it can be easily equipped with electronic lock systems to enhance security.




TALFIX

Multi-functional, patented Talfix system with 10.000 holes enables you to combine carriage-loading models in one trailer. It offers double decking, garment hanging and extra load security. It provides multi functional usage of the vehicle to increase profitability.



DOUBLE DECK BAR

A component of patented Talfix systems, the double deck bar with 1 daN capacity each, allows you to create a second tier inside the vehicle for maximum carrying capacity. Plus, the height of the deck can be adjusted for maximum efficiency and profitability.

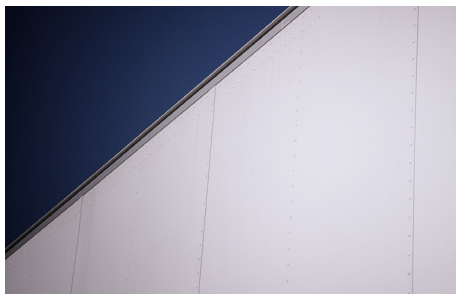


ALUMINUM SIDE PANELS

Talson's self-supporting box body construction is manufactured using a special aluminium sandwich design. The outer layer consists of high-quality aluminium sheets that are connected to the sub-structure and provide a lighter and brighter design. Aluminium side panels are made up between 10 to 12 separate plates allowing cheap and fast repair when needed. You can easily change the dented plate without touching the others.



FLOOR PROTECTION PLATE

The entrance of the trailer is lined with a 600 mm, non slip steel plate.

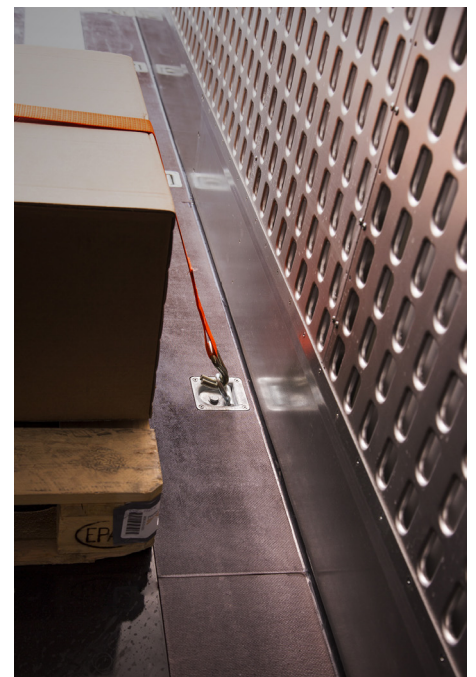

INTEGRATED LASHING RINGS

Talson trailers are equipped with 26 lashing rings, 13 on each side, discreetly integrated into the vehicle floor to anchor heavy weights for maximum load security.