


Talson Specials

TCM TAL

Technical Sheet

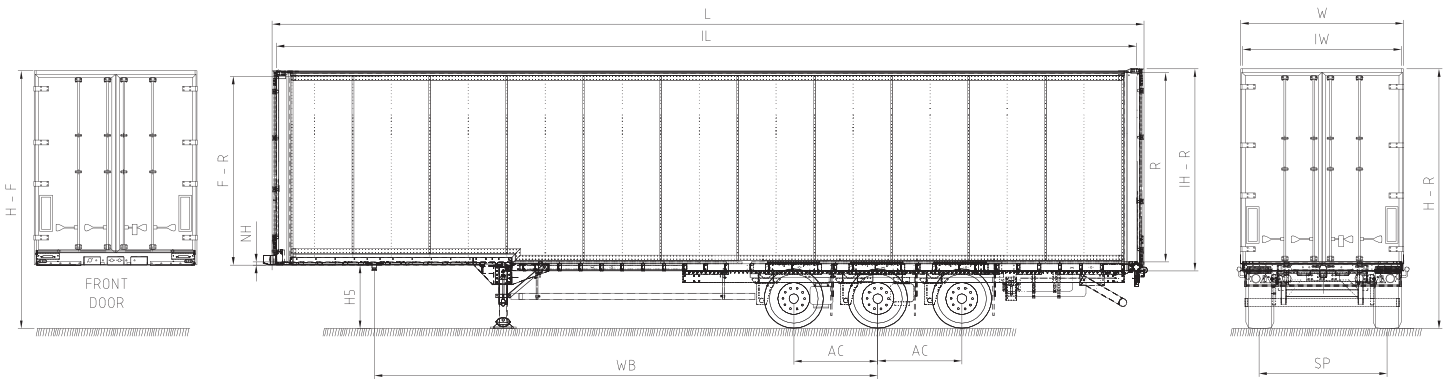

TECHNICAL DATA

H5	5th Wheel Height	1.020 mm
WB	Wheel Base	7.850 mm
IL	Inner Length	13.320 mm
L	Total Length	13.595 mm
IW	Inner Width	2.472 mm
W	Total Width	2.550 mm
H	Overall Height	4.035 mm
IH	Inner Height	2.900 mm

TECHNICAL CAPACITIES

Tare Weight	9.440 kg
Total Permissible Weight	39.000 kg
Technical Possible Axle Load	27.000 kg
Technical Possible King-pin Load	12.000 kg

SPECIAL FEATURES

- Aluminium panel technology
- Multi-purpose Talfix® panels
- EN 12642 - Code XL Certificate
- Special carpet cradle
- Easy loading/unloading with front and rear doors
- Special forklift space

Talson Specials

TCM TAL

Detail Brochure



SIDE UNDERRUN PROTECTION

The side underrun rail is a lateral protection device made of KTL coated steel profile which can be folded upwards for easier access to the vehicle when needed.




FRONT AND REAR LOADING

With doors opening on each side, double sided loading makes it especially easy to load carpets and other lengthy loads.



CARPET CRADLE

Special carpet cradle is designed to make carpet loading/unloading significantly easier and faster. It has 20 epdm rubbers on its floor to provide a high range of movement and effectiveness. Steel floor and aluminum side panels make it sturdy and durable. With its lock-in-place system it can be stabilized in 5 different positions inside the carriage to offer operational ease.

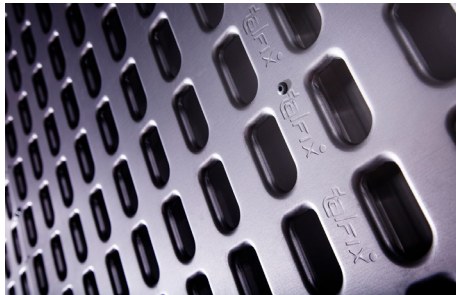


TALFIX

Multi-functional, patented Talfix system enables you to combine carriage-loading models in one trailer. It offers double decking, garment hanging, and extra load security. It provides multi-functional usage of the vehicle to increase profitability.



ALUMINUM SIDE PANELS

Talson's self-supporting box body construction is manufactured using a special aluminum sandwich design. The outer layer consists of high-quality aluminum sheets that are connected to the sub-structure and provide a lighter and brighter design. Aluminum side panels are made up between 10 to 12 separate plates allowing cheap and fast repair when needed. You can easily change the dented plate without touching the others.

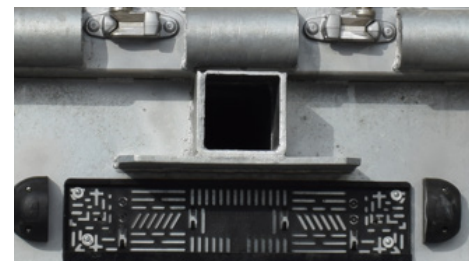

SPECIAL FORKLIFT SPACE

Thanks to the special forklift space, the forklift can be connected to the trailer and transported to the location of the loading and transportation operation.



INTEGRATED LASHING RINGS

Talson trailers are equipped with 26 lashing rings, 13 on each side, discreetly integrated into the vehicle floor to anchor heavy weights for maximum load security.



DOUBLE DECK

A component of patented Talfix systems, the double deck bar with 1 daN capacity each, allows you to create a second tier inside the vehicle for maximum carrying capacity. Plus, the height of the deck can be adjusted for maximum efficiency and profitability.