

talson !

Olivier van Noortweg 7 5928 LX Venlo The Netherlands T +31 (0) 492 588 600 F +31 (0) 492 588 609 sales@talson.com / www.talson.com

Talson Air Cargo
TAG ISO
Technical Sheet























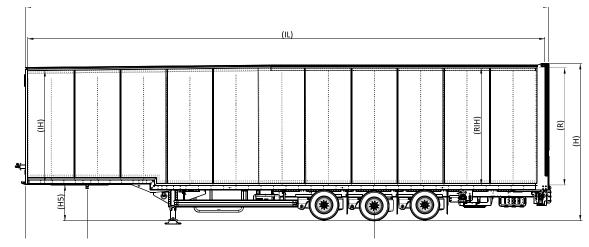

TECHNICAL DATA

H5	5 th Wheel Height	950 mm
WB	Wheel Base	7.455 mm
IL	Inner Length	13.435 mm
L	Total Length	13.610 mm
IW	Inner Width	2.500 mm
W	Total Width	2.600 mm
H-F	Front Overall Height	3.985 mm
H-R	Rear Overall Height	4.060 mm
IH-F	Front Internal Height	2.950 mm
IH-R	Rear Internal Height	3.030 mm

TECHNICAL CAPACITIES

Tare Weight	8.850 kg
Total Permissible Weight	36.000 kg
Technical Possible Axle Load	24.000 kg
Technical Possible King-pin Load	12.000 kg

SPECIAL FEATURES

- · Aluminum outside panels
- · Roller bed auto-down safety function
- · GRP inside panels
- · EN 12642 Code XL Certificate



Talson Air Cargo TAG ISO Detail Brochure



CONCORDE ROOF

Mega air cargo trailers are fitted with a slanted roof. This ensures that the trailers are not higher than 4.000 mm at the front.



ROLLERBEDS

Rollerbeds are integrated into the vehicle floors in order to facilitate speedy loading and unloading of loads. With Auto Down Safety rollers lower down into the floor automatically while driving for maximum load security.



PROTECTED FRONT PANEL

Front panel of the trailer is strengthened with a galvanized kick plate 500 to 1.000 mm above the floor.



















KICK PLATE

Aluminum kick plate with 250 mm height on the side panels provides high impact resistance.



PALLET STOPPER

There are 10 flip-up pallet stoppers inside the trailer, 2 per air cargo pallet section and 2 to protect the front wall. This offers maximum load security whilst driving.



INTEGRATED LASHING RINGS

Talson trailers are equipped with 26 lashing rings, 13 on each side, discreetly integrated into the vehicle floor to anchor heavy weights for maximum load security.



ALUMINUM SIDE PANELS

Talson's self-supporting box body construction is manufactured using a special aluminum sandwich design. The outer layer consists of high-quality aluminum sheets that are connected to the sub-structure and provide a lighter and brighter design. Aluminum side panels are made up between 10 to 12 separate plates allowing cheap and fast repair when needed. You can easily change the dented plate without touching the others.



INSULATED TALSON DOOR

Talson door is a container style door, designed to provide maximum strength at the rear and optimum load security. It improves durability and handling of the trailer. Also, it can be easily equipped with electronic lock systems to enhance security.